

APPROVED FRAMING, BY OTHERS  
(SEE NOTE 2)

SECUROCK® EXOAIR® 430

PAPER BACKING, BY OTHERS

METAL PLASTER BASE AS SPECIFIED, BY OTHERS

STUCCOAT ONE COAT BASE, 3/8" MIN.

STANDARD REINFORCING MESH

STUCCOAT CRACK ISOLATION MEMBRANE

DRYVIT PRIMER, AS SPECIFIED OR REQUIRED


WEATHERLASTIC® FINISH

CASING BEAD WITH WEEP HOLES, BY OTHERS


TREMCO DYMONIC® 100 OR  
TREMCO EXOAIR® 110AT WITH  
DYMONIC 100 TERMINATION BEAD  
(SEE NOTE 1)

FLASHING, BY OTHERS


TREMCO DYMONIC® 100  
(SEE NOTE 1)

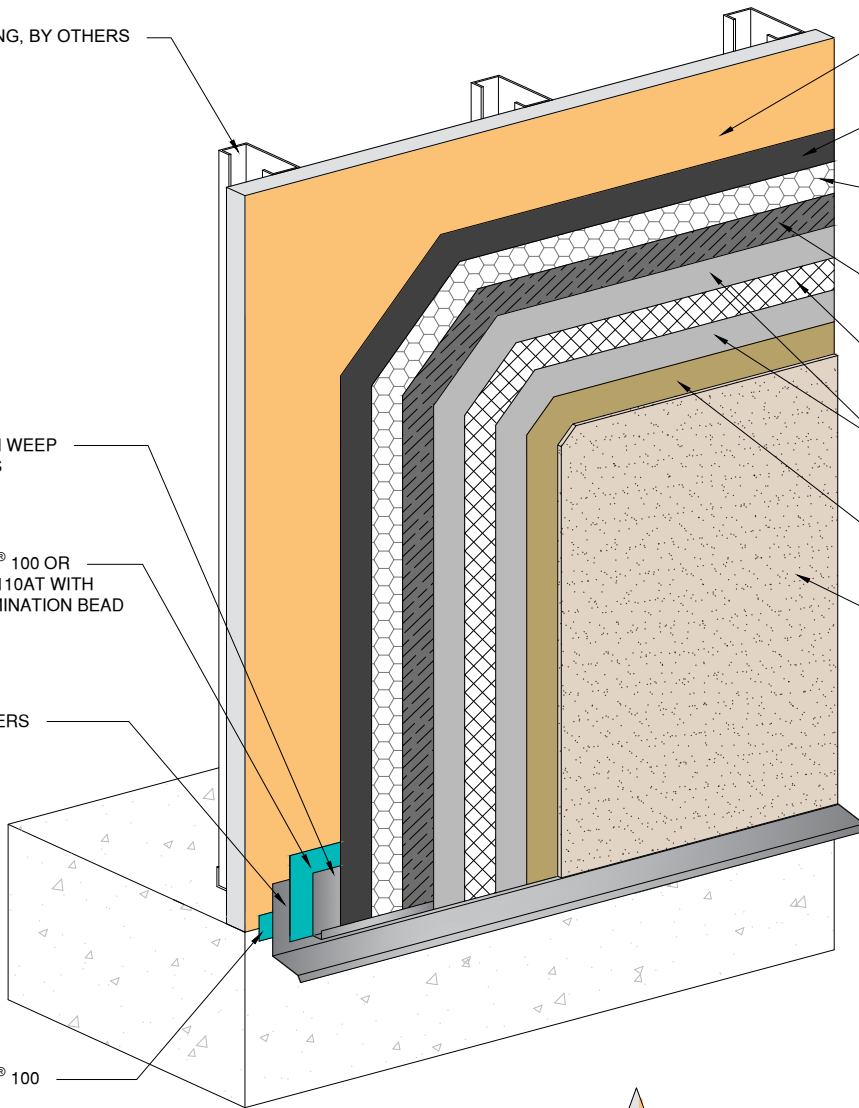

WEEP SCREED, BY OTHERS

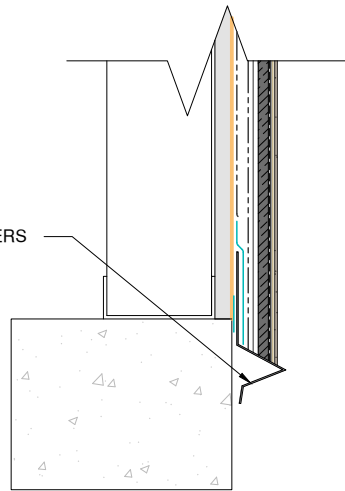

WEEP SCREED OPTION SECTION DETAIL

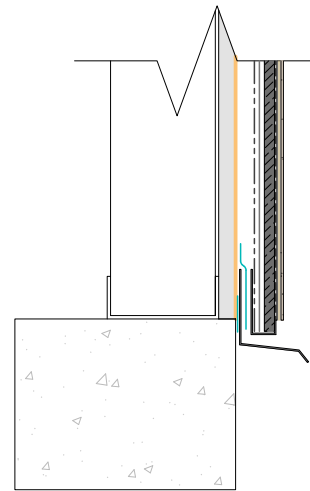

SECTION DETAIL

- NOTE:
1. REFER TO PRODUCT DATA SHEETS FOR SPECIFIC APPLICATION METHODS.
  2. WALL ASSEMBLY SHALL PROVIDE FOR A MAXIMUM DESIGN DEFLECTION OF L/360.

*The architecture, engineering, and design of the project using the Dryvit, Tremco and USG products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit, Tremco and USG specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit, Tremco and USG to ensure you have the most recent version.*



Dryvit Technical Support: 800-556-7752

**StucCoat One Coat® Securock® ExoAir 430 System**



Technical Support: 866-209-2404

Detail: StucCoat One Coat Securock ExoAir 430 System

Drawn by: KAB

Checked by: BD/CB

Scale: NTS

Date: 4/2023

File Name:

SCOC SE430 1



www.tremcocpg.com