

FOR JOINT
DETAILING SEE
NOTES 7, 8

1" (25 MM) MIN.

2" (51 MM) MIN.

**DRAINAGE TRACK OPTION
(SEE NOTES 3, 4)**

DRYVIT DRAINAGE STRIP™
(SEE NOTE 2)


DRYVIT DETAIL MESH® WRAPPED
TO BACKSIDE OF EPS MIN. 2 1/2" (64 MM)

CODE APPROVED WATER-RESISTIVE
BARRIER, BY OTHERS, LAPPED
OVER DRAINAGE TRACK

DRYVIT DRAINAGE MAT

DRYVIT AQUAFASH® SYSTEM, DRYVIT
BACKSTOP® FLASH AND FILL, OR TREMCO
DYMONIC 100 (SEE NOTES 7, 8)

DRYVIT DRAINAGE TRACK
(SEE NOTES 3, 4)

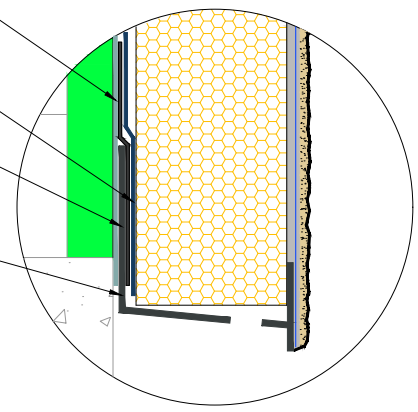

NOTE:

1. DRYVIT RECOMMENDS THAT GROUND FLOOR APPLICATIONS AND ALL FACADES EXPOSED TO ABNORMAL STRESS, HIGH TRAFFIC, OR DELIBERATE IMPACT HAVE THE BASE COAT REINFORCED WITH PANZER® MESH PRIOR TO STANDARD OR STANDARD PLUS MESH. LOCATION OF HIGH IMPACT ZONES SHOULD BE INDICATED ON CONTRACT DRAWINGS.
2. ENSURE BOTTOM EDGE OF DRAINAGE STRIP IS LEFT FREE TO DRAIN.
3. LIGHTLY SAND SURFACE OF DRAINAGE TRACK TO MAXIMIZE ADHESION.
4. IF PROJECT IS DEFINED AS NON-COMBUSTIBLE, DRAINAGE TRACK USAGE IS LIMITED TO THE BASE OF THE SYSTEM AT FINISHED GRADE LEVEL.
5. DRYVIT GENESIS® OR GENESIS DM BASE COAT IS REQUIRED FOR MECHANICALLY FASTENED SYSTEMS 1-3.
6. FASTENERS ARE NOT REQUIRED FOR SYSTEMS 4 OR 5.
7. REFER TO PRODUCT DATA SHEETS FOR SPECIFIC APPLICATION METHODS.
8. BACKSTOP® FLASH AND FILL MAY ONLY BE USED WITH BACKSTOP® NTX™ AWRB.

The architecture, engineering, and design of the project using the Dryvit and Tremco products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Dryvit and Tremco specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Dryvit and Tremco to ensure you have the most recent version.

Outsulation® RMD System™

<p style="font-size: 8px; margin-top: 5px;">Dryvit Technical Support: 800-556-7752</p>	Detail: Termination at Concrete Curb				File Name:		<p style="font-size: 8px; margin-top: 5px;">Construction Products Group</p>
	Drawn by: HDE	Checked by: CS	Scale: NTS	Date: 5/19/2023	O-RMD 13		
www.tremcocpg.com							